

LOCK SWITCH


LS300 LOCK SWITCH

ELECTRICAL & MECHANICAL SPECIFICATION

Switch Rating:	2A @ 240V ac 4A @ 125V ac	Life	>10,000
Note -	Not mains isolating	Operating Temperature:	-20°C to +65°C
Proof Voltage	1500V ac (Initial)	Insulation Resistance:	>999MΩ @ 500V dc (Initial)
		Contact Resistance:	>10mΩ (Initial)

FEATURES

Single pole single throw	Radial cylinder with 7 pin tumblers	10,000 key differs
Front panel mount	Bright chrome plated zinc alloy die cast housing Tapered lock head	Key inserted / removed in both positions 90° indexing

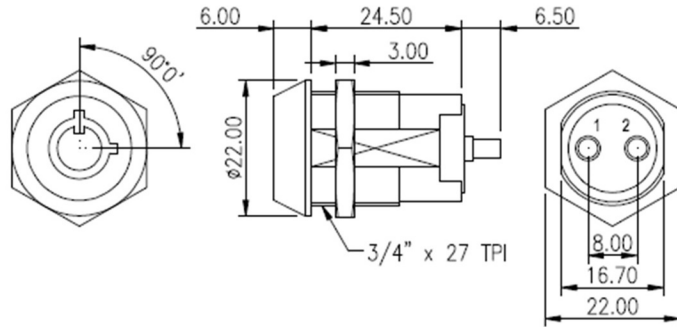

ORDERING CODE

ORDERING CODE	TERMINALS	KEY FREE	KEY TRAVEL	CONTACT POSITION
LS300	2	2	90°	

PANEL PIERCING DETAILS

